

Room 10C60/10C62. 10F Shanghai Mart Tower
2299 Yan An. Road West, Changning District
Shanghai 200336 China

www.amsupplyasia.com
+86 21 5291 9259
info@amsupplyasia.com

FAUCET

Reference	AMS-SW001
Mixer body	Brass
Handle	Zinc
Chrome thickness for mixer body (um)	0.25-0.30
Max open angle	25 °
Max turn angle	110 °
Torque	8-12 Nm(Nomal 10 Nm)
Pressure resistance	Min. 45 bar
Working pressure	Max.12 bar
Max. Temperature	90 °
Max sound lever in an edeal body	17-18 db(A) at 3 bar , 21-22 db(A) at 5 bar
Flow rate (D resistance)	13.8 -15.6 L/min at 3 bar
Endurance test	Min 500000 times (ASME A112.18.1-2005/CSA B125.1-05)


OTHERS

»»Life test for single lever mixer :when 0.3MPa. hot water =65 degree +/-2 degree , cold water under or = 30 degree , the endurance is Min 500000 times (ASME A112.18.1-2005/CSA B125.1-05)

»»Spool material : MJ uper seal cartridge: Ceramic:Al₂O₃ 96%

»»fixing screw : stainless steel 304

Details of FAUCET

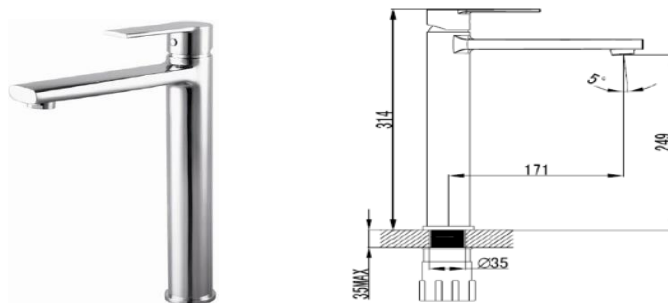

Packing Information	
Psc per carton	6
Carton size (mm)	470x455x215